

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :
Customer reference : SISEL TECH - ROMANIA

Product line : W22 IE3 Three-Phase Product code : 12862392

| | | | |
|-----------------------|---------------------------|-----------------------------|-----------------------|
| Frame | : 160M | Locked rotor time | : 14s (cold) 8s (hot) |
| Output | : 11 kW (15 HP) | Temperature rise | : 80 K |
| Poles | : 2 | Duty cycle | : S1 |
| Frequency | : 50 Hz | Ambient temperature | : -20°C to +40°C |
| Rated voltage | : 400/690 V | Altitude | : 1000 m.a.s.l. |
| Rated current | : 21.0/12.2 A | Protection degree | : IP55 |
| L. R. Amperes | : 178/103 A | Cooling method | : IC411 - TEFC |
| LRC | : 8.5 | Mounting | : B3T |
| No load current | : 10.1/5.86 A | Rotation ¹ | : Both (CW and CCW) |
| Rated speed | : 2960 rpm | Noise level ² | : 67.0 dB(A) |
| Slip | : 1.33 % | Starting method | : Direct On Line |
| Rated torque | : 35.5 Nm | Approx. weight ³ | : 125 kg |
| Locked rotor torque | : 310 % | | |
| Breakdown torque | : 380 % | | |
| Insulation class | : F | | |
| Service factor | : 1.00 | | |
| Moment of inertia (J) | : 0.0482 kgm ² | | |
| Design | : N | | |

| | | | | | |
|----------------|------|------|------|------------------|----------|
| Output | 50% | 75% | 100% | Foundation loads | |
| Efficiency (%) | 89.0 | 91.0 | 91.2 | Max. traction | : 1567 N |
| Power Factor | 0.65 | 0.76 | 0.83 | Max. compression | : 2797 N |

Losses at normative operating points (speed;torque), in percentage of rated output power

| P1 (0,9;1,0) | P2 (0,5;1,0) | P3 (0,25;1,0) | P4 (0,9;0,5) | P5 (0,5;0,5) | P6 (0,5;0,25) | P7 (0,25;0,25) |
|--------------|--------------|---------------|--------------|--------------|---------------|----------------|
| 9.3 | 7.7 | 7.1 | 5.1 | 3.4 | 2.4 | 1.7 |

| | Drive end | Non drive end |
|----------------------|--------------------|---------------|
| Bearing type | : 6309 ZZ C3 | : 6209 ZZ C3 |
| Sealing | : V'Ring | : V'Ring |
| Lubrication interval | : - | : - |
| Lubricant amount | : - | : - |
| Lubricant type | : Mobil Polyrex EM | |

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in IEC 60034-1.

| Rev. | Changes Summary | Performed | Checked | Date |
|--------------|-----------------|-----------|---------|----------|
| | | | | |
| Performed by | | | | |
| Checked by | | | Page | Revision |
| Date | 19/07/2023 | | 1 / 6 | |

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :
Customer reference : SISEL TECH - ROMANIA

Thermal protection

| ID | Application | Type | Quantity | Sensing Temperature |
|----|-------------|----------------------|-----------|---------------------|
| 1 | Winding | Thermistor - 2 wires | 1 x Phase | 155 °C |

| Rev. | Changes Summary | Performed | Checked | Date |
|--------------|-----------------|-----------|---------|----------|
| Performed by | | | | |
| Checked by | | | Page | Revision |
| Date | 19/07/2023 | | 2 / 6 | |

TORQUE AND CURRENT VS SPEED CURVE




Three Phase Induction Motor - Squirrel Cage

Customer :
Customer reference : SISEL TECH - ROMANIA

Product line : W22 IE3 Three-Phase

Product code : 12862392

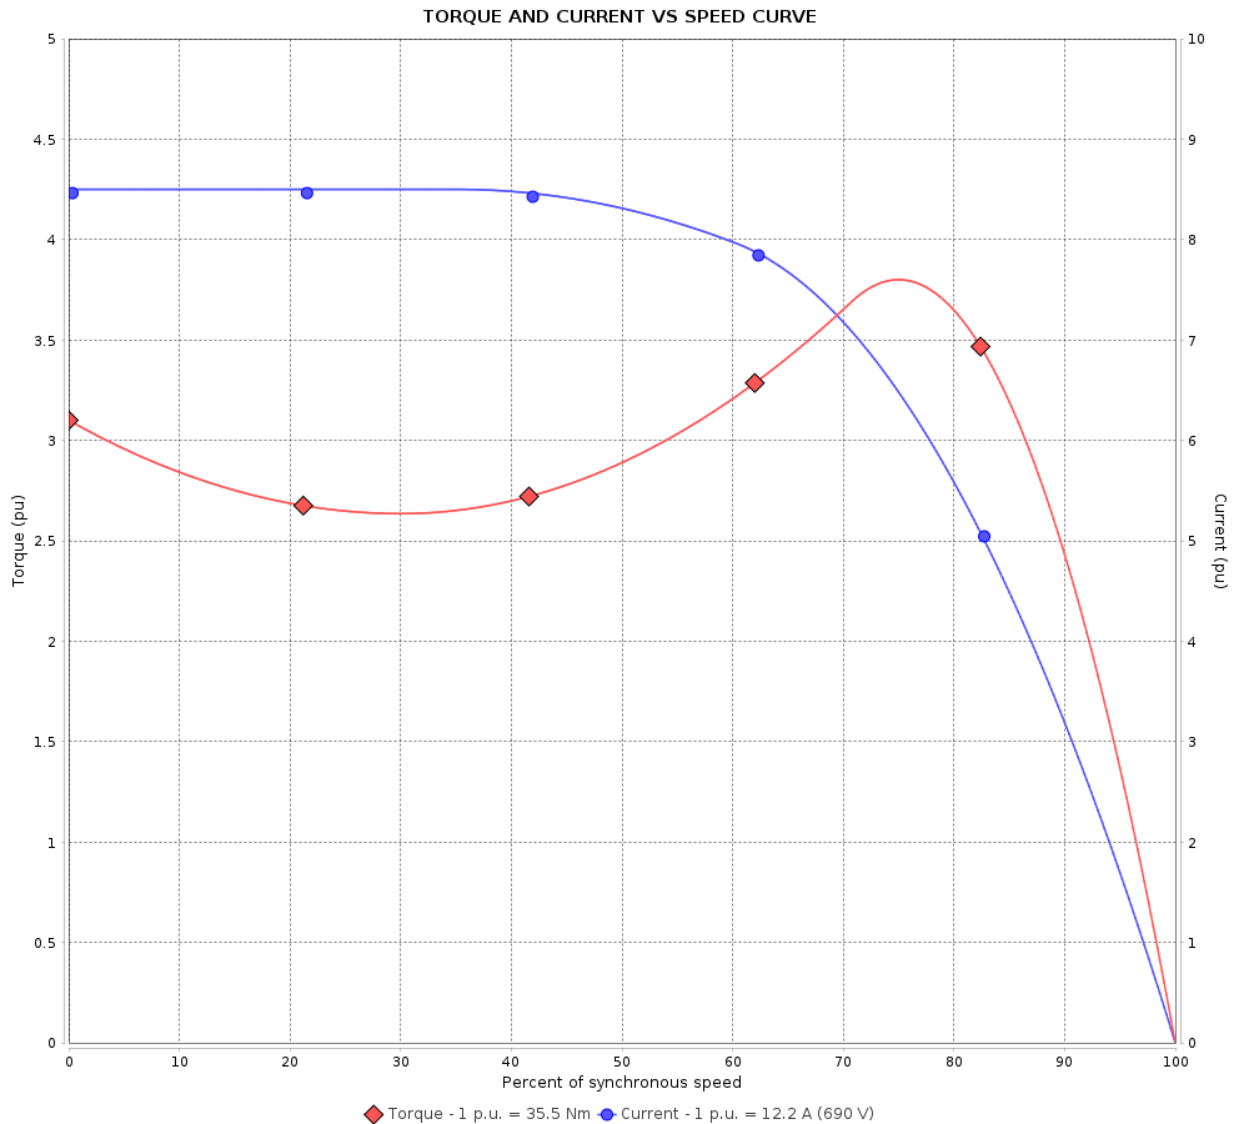

Performance : 400/690 V 50 Hz 2P

| | | | |
|---------------------|---------------|-----------------------|---------------------------|
| Rated current | : 21.0/12.2 A | Moment of inertia (J) | : 0.0482 kgm ² |
| LRC | : 8.5 | Duty cycle | : S1 |
| Rated torque | : 35.5 Nm | Insulation class | : F |
| Locked rotor torque | : 310 % | Service factor | : 1.00 |
| Breakdown torque | : 380 % | Temperature rise | : 80 K |
| Rated speed | : 2960 rpm | Design | : N |

Locked rotor time : 14s (cold) 8s (hot)

| Rev. | Changes Summary | Performed | Checked | Date |
|--------------|-----------------|-----------|---------|----------|
| | | | | |
| Performed by | | | Page | Revision |
| Checked by | | | | |
| Date | 19/07/2023 | | | |
| | | | 3 / 6 | |

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :
Customer reference : SISEL TECH - ROMANIA

Product line : W22 IE3 Three-Phase

Product code : 12862392

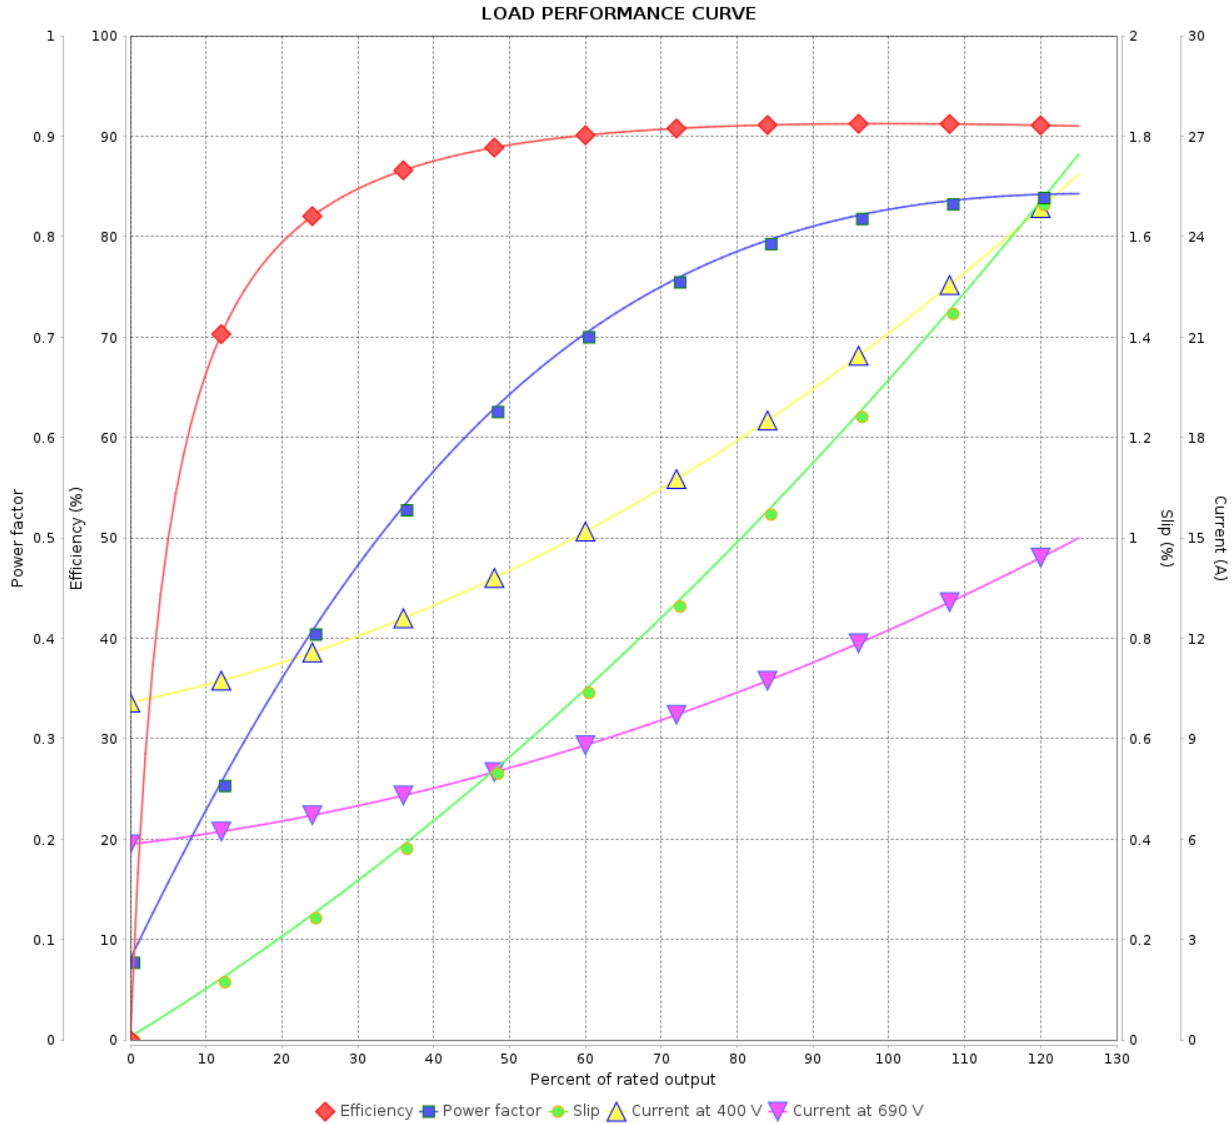


Performance : 400/690 V 50 Hz 2P

Rated current : 21.0/12.2 A
 LRC : 8.5
 Rated torque : 35.5 Nm
 Locked rotor torque : 310 %
 Breakdown torque : 380 %
 Rated speed : 2960 rpm

Moment of inertia (J) : 0.0482 kgm²
 Duty cycle : S1
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : N

| Rev. | Changes Summary | Performed | Checked | Date |
|--------------|-----------------|-----------|---------------|----------|
| | | | | |
| Performed by | | | Page 4 / 6 | Revision |
| Checked by | | | | |
| Date | 19/07/2023 | | | |

THERMAL LIMIT CURVE




Three Phase Induction Motor - Squirrel Cage

Customer :
Customer reference : SISEL TECH - ROMANIA

Product line : W22 IE3 Three-Phase

Product code : 12862392

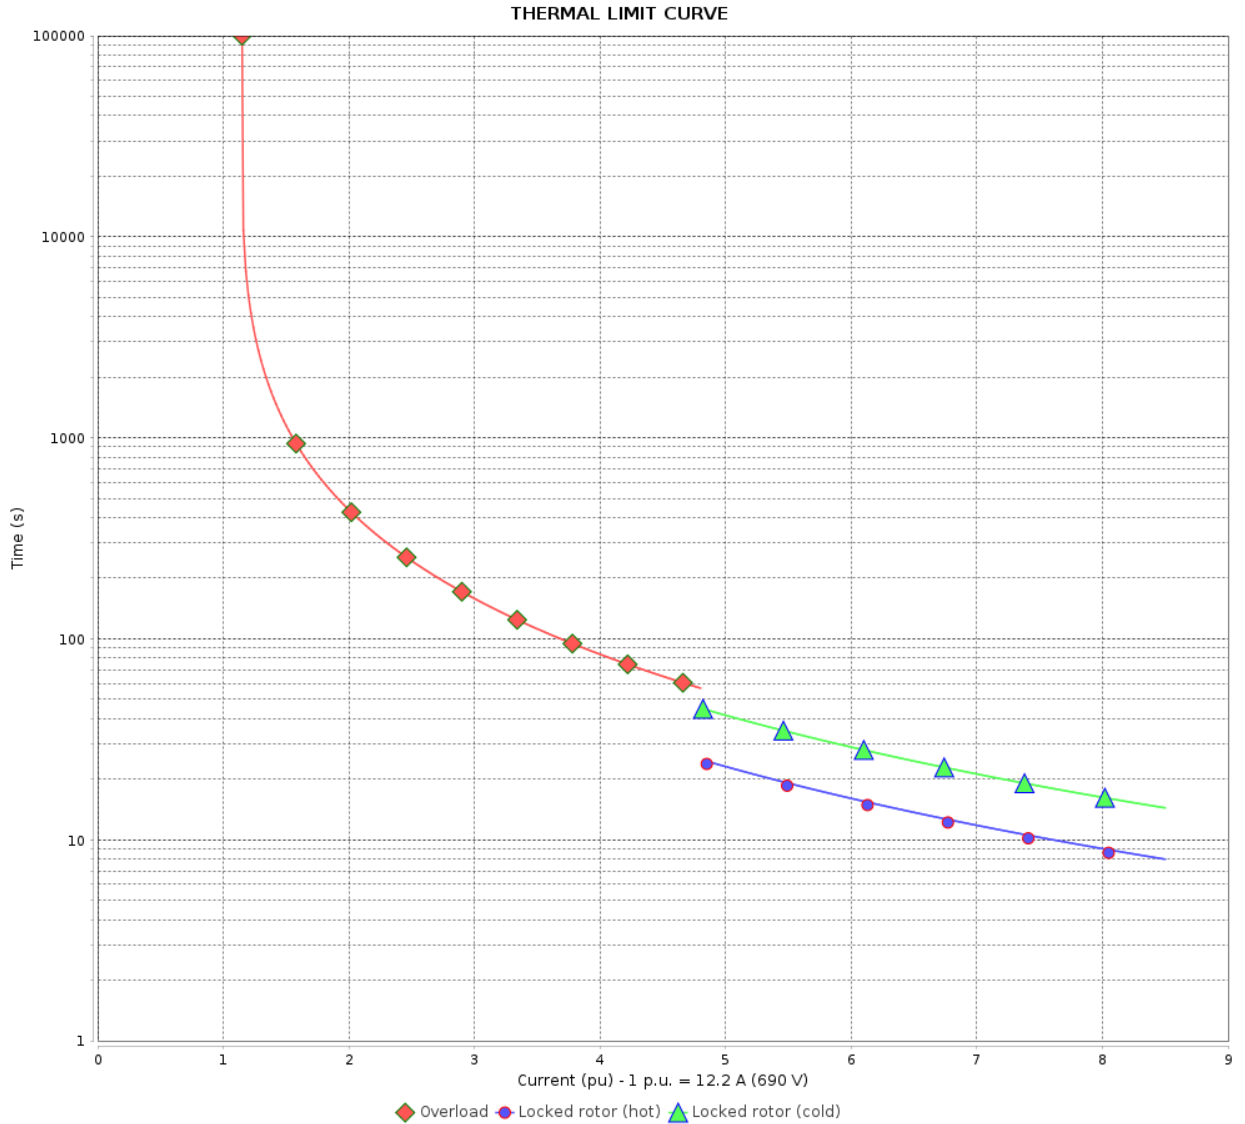

Performance : 400/690 V 50 Hz 2P

Rated current : 21.0/12.2 A
LRC : 8.5
Rated torque : 35.5 Nm
Locked rotor torque : 310 %
Breakdown torque : 380 %
Rated speed : 2960 rpm

Moment of inertia (J) : 0.0482 kgm²
Duty cycle : S1
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : N

Heating constant

Cooling constant

| Rev. | Changes Summary | Performed | Checked | Date |
|--------------|-----------------|-----------|----------|------|
| | | | | |
| Performed by | | | | |
| Checked by | | | | |
| Date | | | | |
| | | Page | Revision | |
| | | 5 / 6 | | |

VFD OPERATION CURVE




Three Phase Induction Motor - Squirrel Cage

Customer :
Customer reference : SISEL TECH - ROMANIA

Product line : W22 IE3 Three-Phase

Product code : 12862392

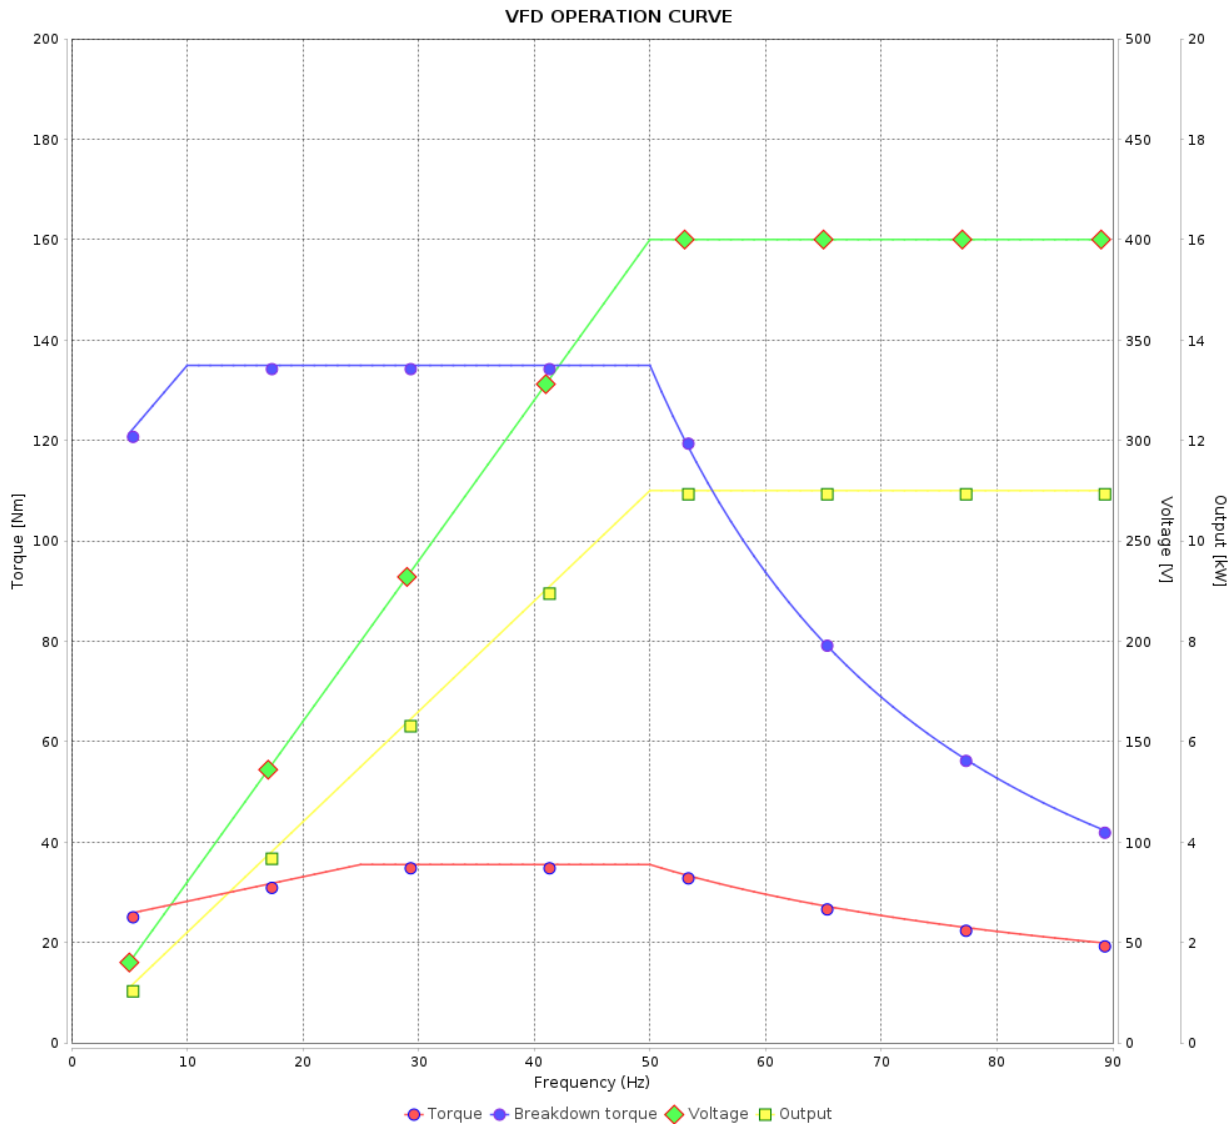

Performance : 400/690 V 50 Hz 2P

Rated current : 21.0/12.2 A
LRC : 8.5
Rated torque : 35.5 Nm
Locked rotor torque : 310 %
Breakdown torque : 380 %
Rated speed : 2960 rpm

Moment of inertia (J) : 0.0482 kgm²
Duty cycle : S1
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : N

| Rev. | Changes Summary | Performed | Checked | Date |
|--------------|-----------------|-----------|---------------|----------|
| | | | | |
| Performed by | | | Page 6 / 6 | Revision |
| Checked by | | | | |
| Date | 19/07/2023 | | | |

